

# Simulator - HDMI Display Mode - NGC

 [haascnc.com/service/troubleshooting-and-how-to/how-to/simulator---hdm-display-mode.html](https://haascnc.com/service/troubleshooting-and-how-to/how-to/simulator---hdm-display-mode.html)

Recently Updated  
Revision 1

LAST UPDATED: 07/23/2020

## Introduction


This procedure will show you how to connect your simulator to a HDMI monitor device. This will allow you to view the simulator display on a TV, PC monitor, projector, etc.

### **Software Compatibility:**

Software version 100.19.000.1200 or higher.

# Simulator with A62 Main Board PCB

---

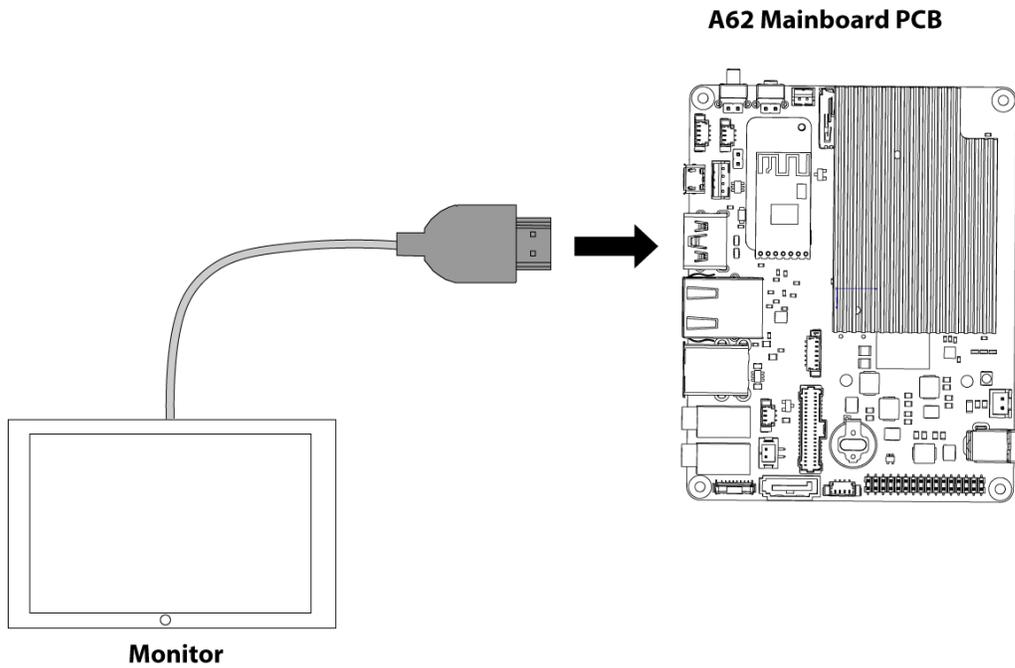

**1**

Power OFF the Simulator.


Remove the back cover.

Remove one of the empty plugs. Feed the HDMI cable through the hole.

Connect a standard HDMI cable between the HDMI connector on the Main board and the HDMI monitor.

# Simulator with Q7 Maincon PCB

---

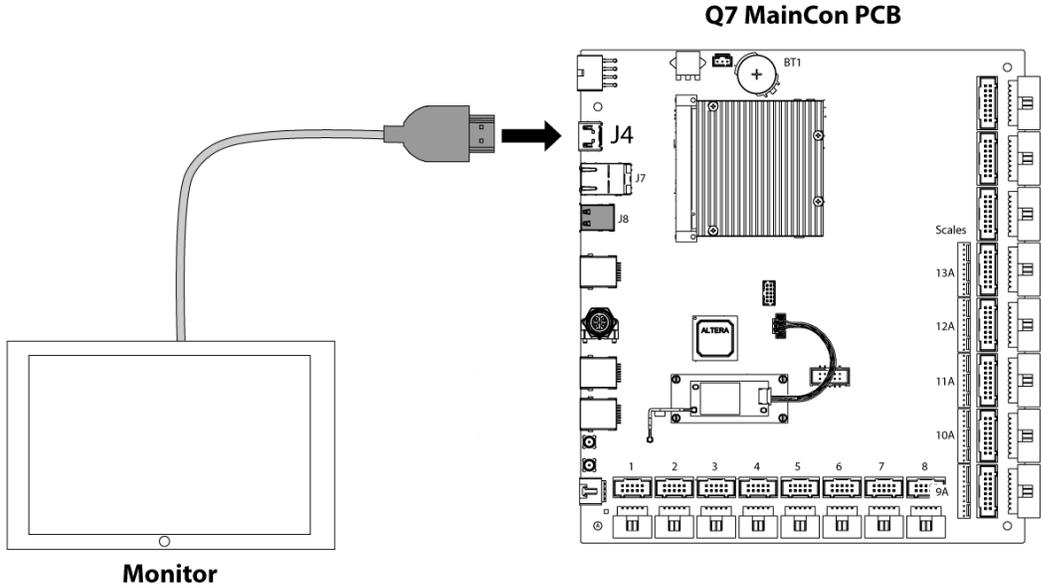

**1**

Power OFF the Simulator.

Remove the back cover.

Remove one of the empty plugs. Feed the HDMI cable through the hole.

Connect a standard HDMI connector J4 on the Mainboard PCB.

# Power On in HDMI Mode

---

Press and hold the '**H**' key while booting for **HDMI mode**.

**Note:** The next time the simulator or machine is powered on the simulator will boot into the standard display option.